



INSTALLATION GUIDE

XODUS DASH MOUNT & CHARGING SYSTEM

XOACFA2

Help@DriveXodus.com

DriveXodus.com



This installation guide is for instructional purposes only. For best results, professional installation by an experienced technician is always recommended. By reading this guide you agree Integrated Engineering is not responsible for any damage caused by incorrect installation.

DIFFICULTY



Expect 40-60 minutes on average

REQUIRED TOOLS

- 7mm Socket
- Trim Removal Tools
- Drill
- 4mm allen
- 8mm wrench or socket
- 5mm Drill Bit
- 12mm Drill Bit
- Flat Head Screwdriver
- Pick

BEFORE YOU BEGIN

It is highly recommended to pre-read this entire guide ahead of your installation to familiarize yourself with each step. Always park your vehicle in a safe and level location and allow plenty of time for the engine bay and exhaust to completely cool. Locate and prepare your work space with each required tool listed above. Unbox all components and verify the contents and quantities before you begin. If anything is missing or damaged, please contact us for immediate help at help@drivexodus.com

REQUIRED PARTS

- No additional parts are required for this install

OPTIONAL PARTS

-

SPECIAL NOTE:

This install guide has been photographed and written on a 2020 Ford F-150. Some steps and factory hardware specifications may vary depending on vehicle model, year, and region. This guide is for reference purposes only. If you are unsure of the installation procedure for any individual step or part, please seek professional help before proceeding.

INCLUDED PARTS

- 01 - XODUS DASH MOUNT
- 02 - HARDWARE PACK
- 03 - BALL MOUNT
- 04 - CHARGING SYSTEM
- 05 - DOUBLE SIDED TAPE
- 06 - MOUNTING TEMPLATE

Some items may be partially assembled.

01



Remove negative battery terminal.

02




Remove rubber tray liner.

03




Using a pick and trim removal tools, remove mesh speaker cover from tray.

04

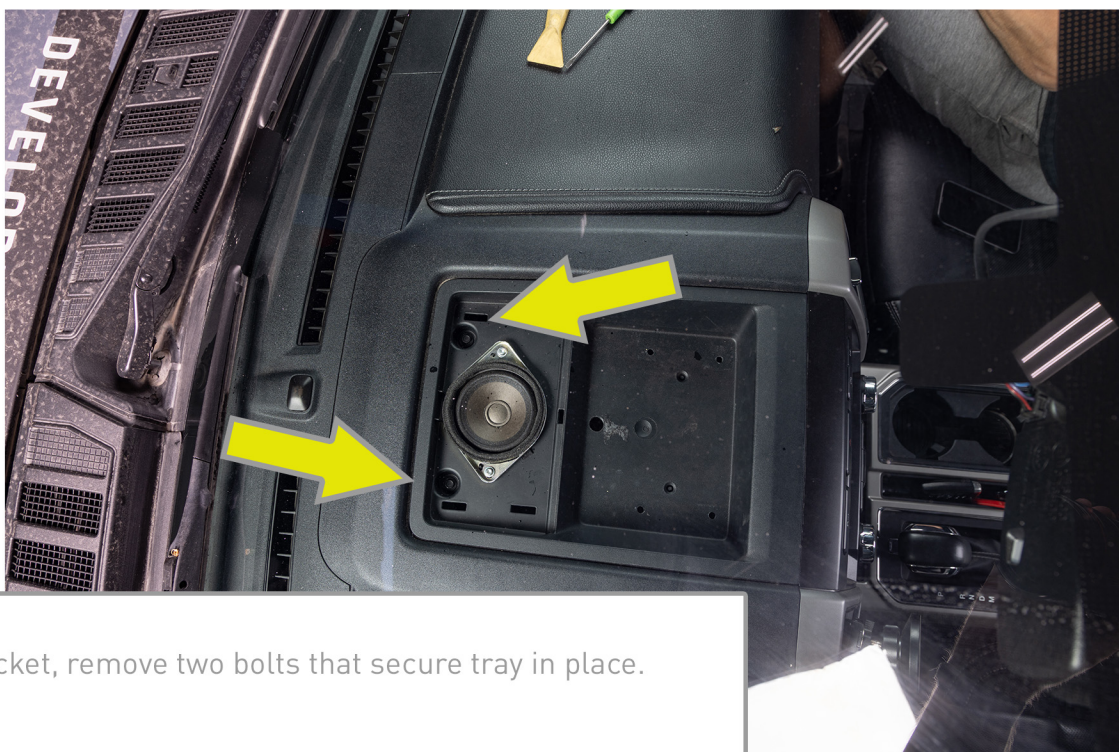


Using a 7mm socket, remove two bolts that secure tray in place.

05

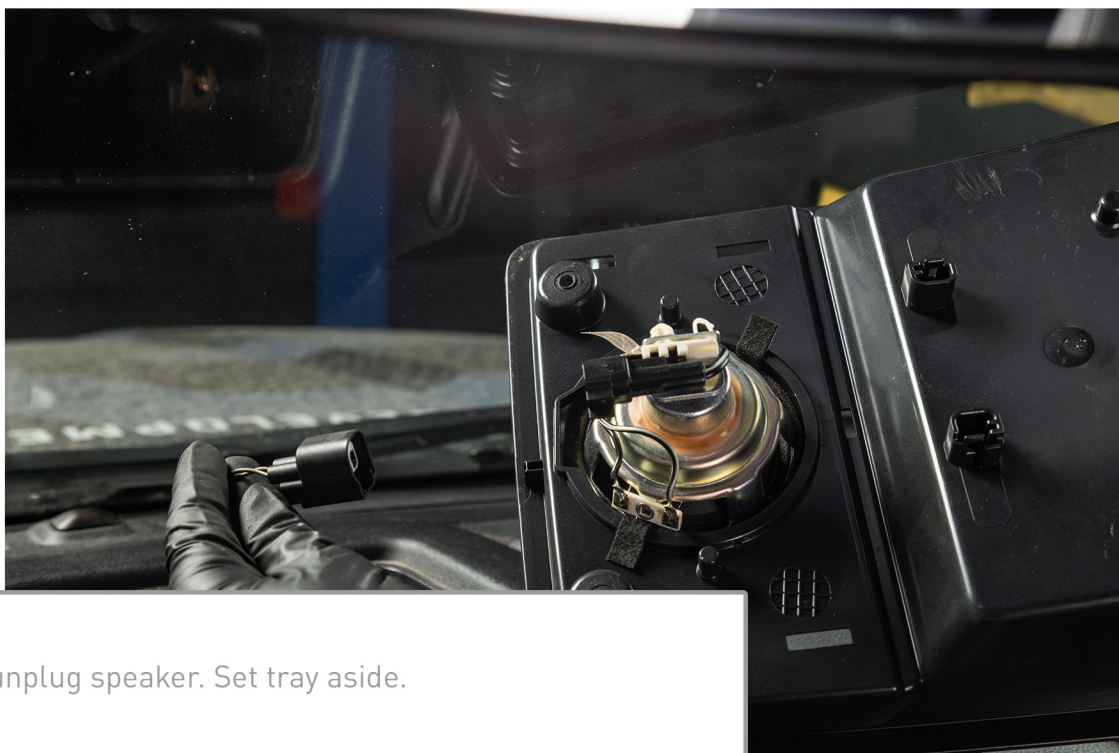

Lift up tray and unplug speaker. Set tray aside.

06

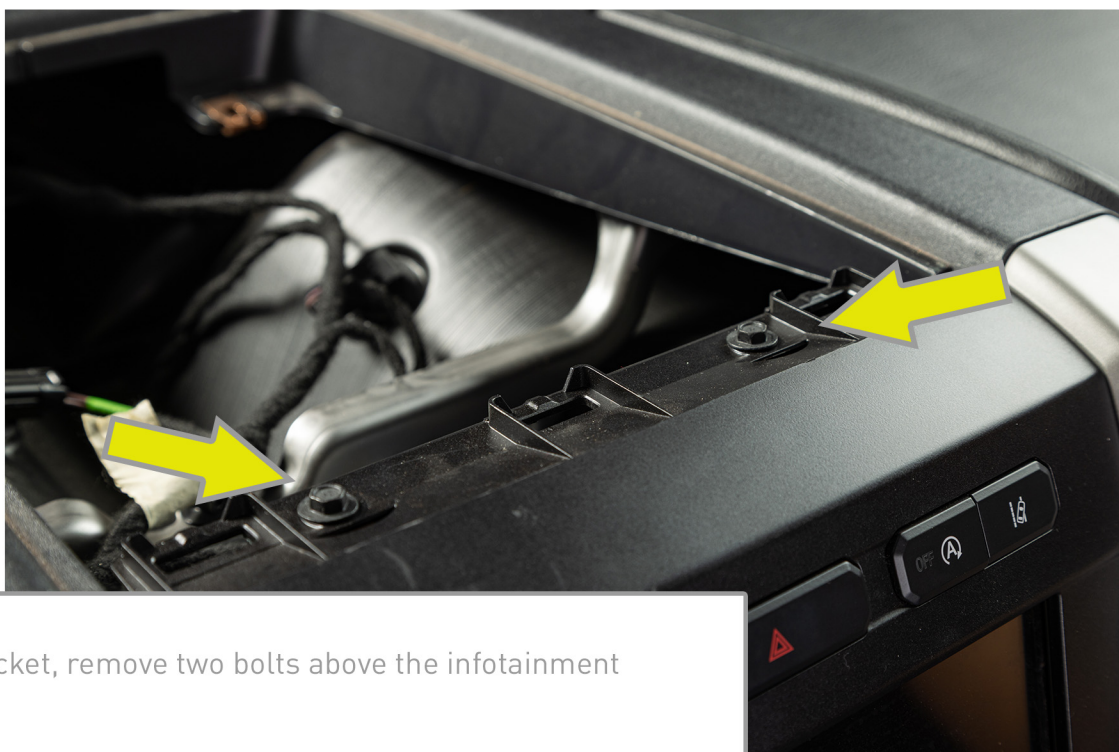

Using a 7mm socket, remove two bolts above the infotainment screen.

07




Using trim removal tools, carefully remove infotainment surround trim. For illustrative purposes this whole piece of trim was removed, however it is possible to complete the install by just moving trim to the side as shown in the photo above.

08



Using trim removal tools, tilt passenger side air vent forward to allow access to rear of cigarette lighter.

09

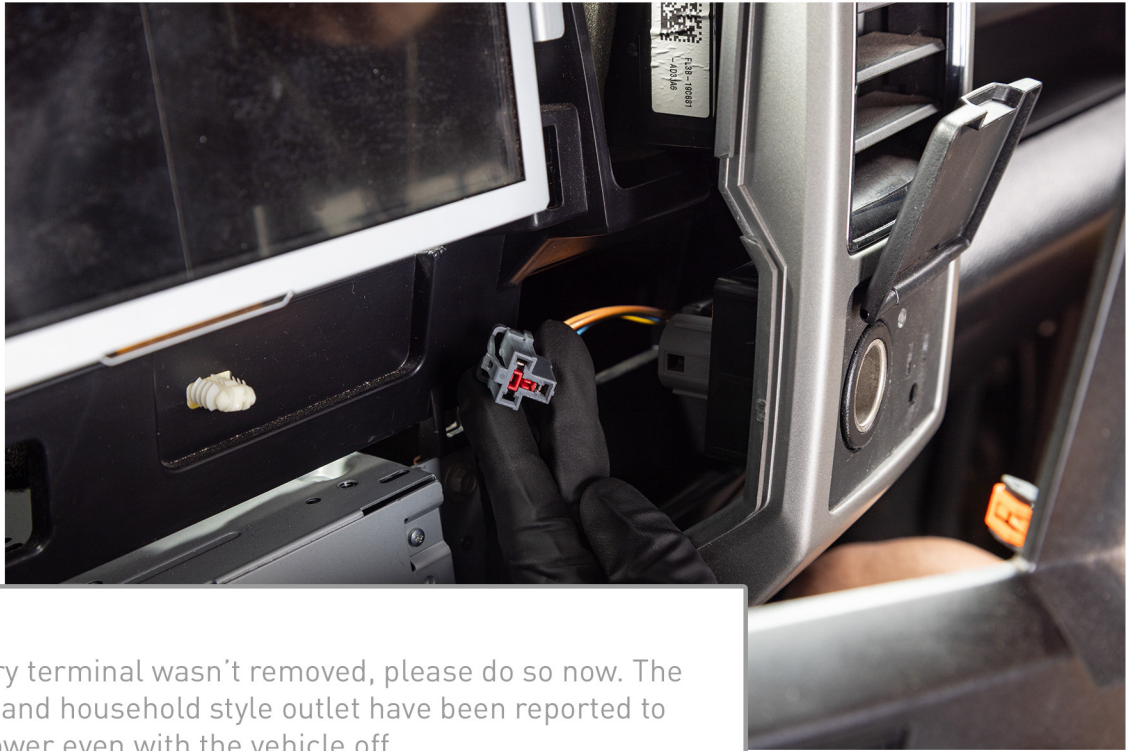

If negative battery terminal wasn't removed, please do so now. The cigarette lighter and household style outlet have been reported to have constant power even with the vehicle off.

Unplug cigarette lighter from behind vent.

10




Snake included cable from tray area behind infotainment screen to the cigarette lighter location.

11




The included cable allows for power to be sent to both the cigarette lighter/household outlet in addition to the Xodus Charging System. Plug in factory male connector to female connector on Xodus cable and plug male Xodus connector into the cigarette lighter/household outlet connector behind air vent.

12

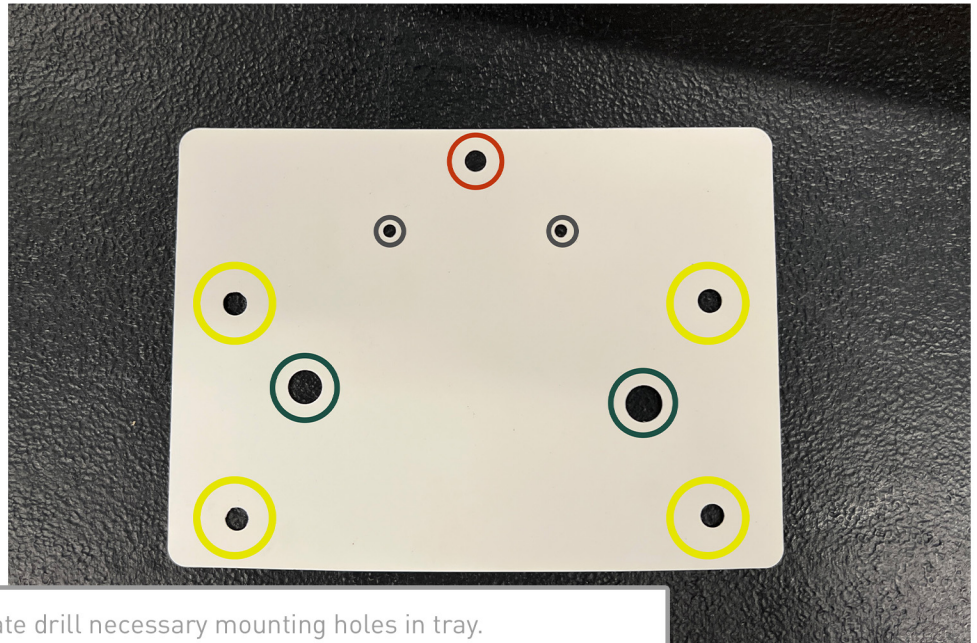

Using the supplied template drill necessary mounting holes in tray. Holes circled in **green** should not be drilled, these are used to line up template with tray. Holes circled in **yellow** should be drilled with a 5mm drill bit. These will be used to secure dash mount. Hole circled in **orange** should be 12mm. Start with a smaller bit and work up or you may risk cracking tray. Holes circled in grey are optional. These can be used to hard mount charging system. We opted to use the included double sided tape. NOTE: HOLES WILL NOT BE CIRCLED ON INCLUDED TEMPLATE

13

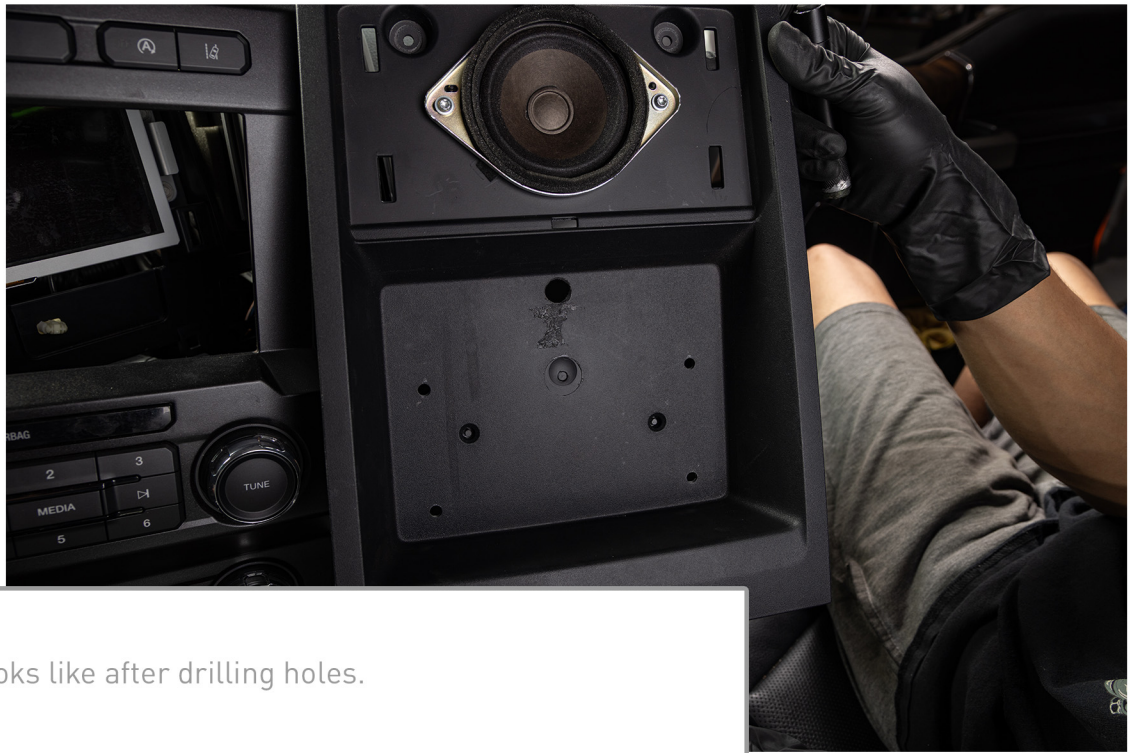

What our tray looks like after drilling holes.

14




Install ball mount onto dash by installing a 4mm bolt and M-LOK nut to ball mount. Align ball mount with a slot and move to desired position. Simply tighten the 4mm allen bolts to secure ball mount to Dash Mount. This can also be done with dash mount installed in vehicle, making it easy to add other accesories or change ball mount position.

15



To install Dash Mount to tray, install included bolt with small washer to tray side and large washer with nut to underside of tray. Tighten using a 4mm allen and 8mm socket or wrench.

16

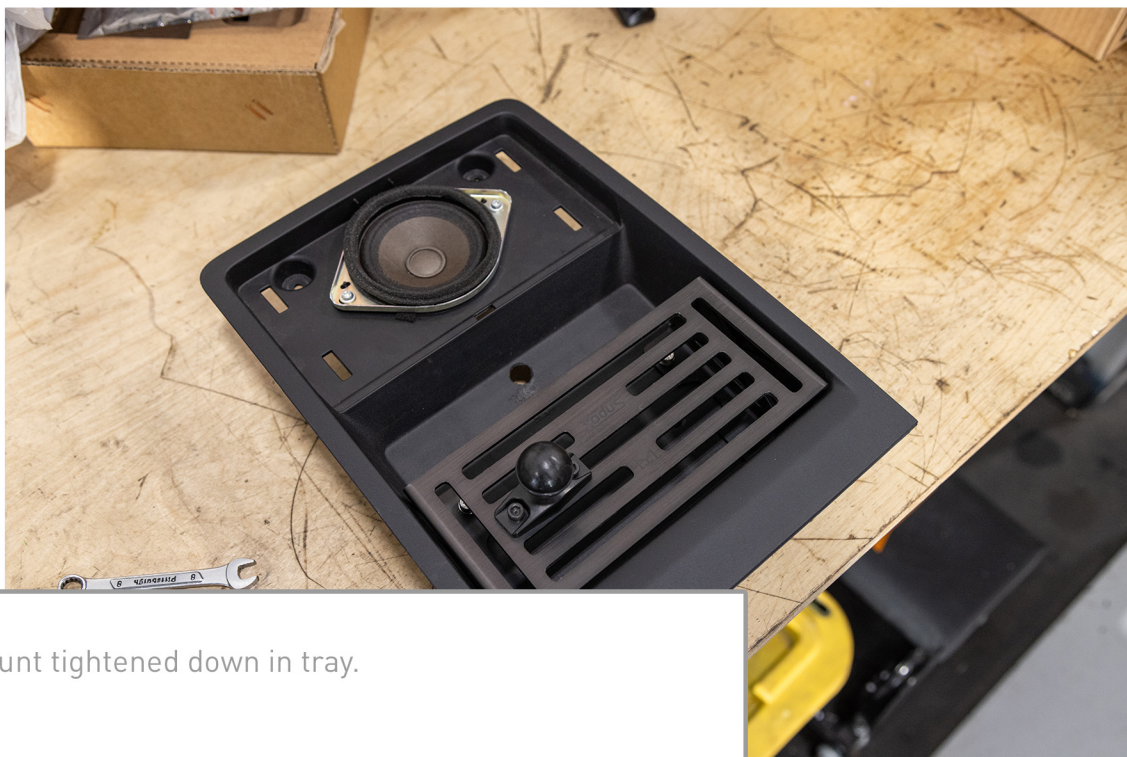

View of Dash Mount tightened down in tray.

17




Insert Charging system through previously drilled 12mm hole.

18



Secure Charging System to tray by either using included double sided tape or installing included screws through previously drilled holes and tightening.

19

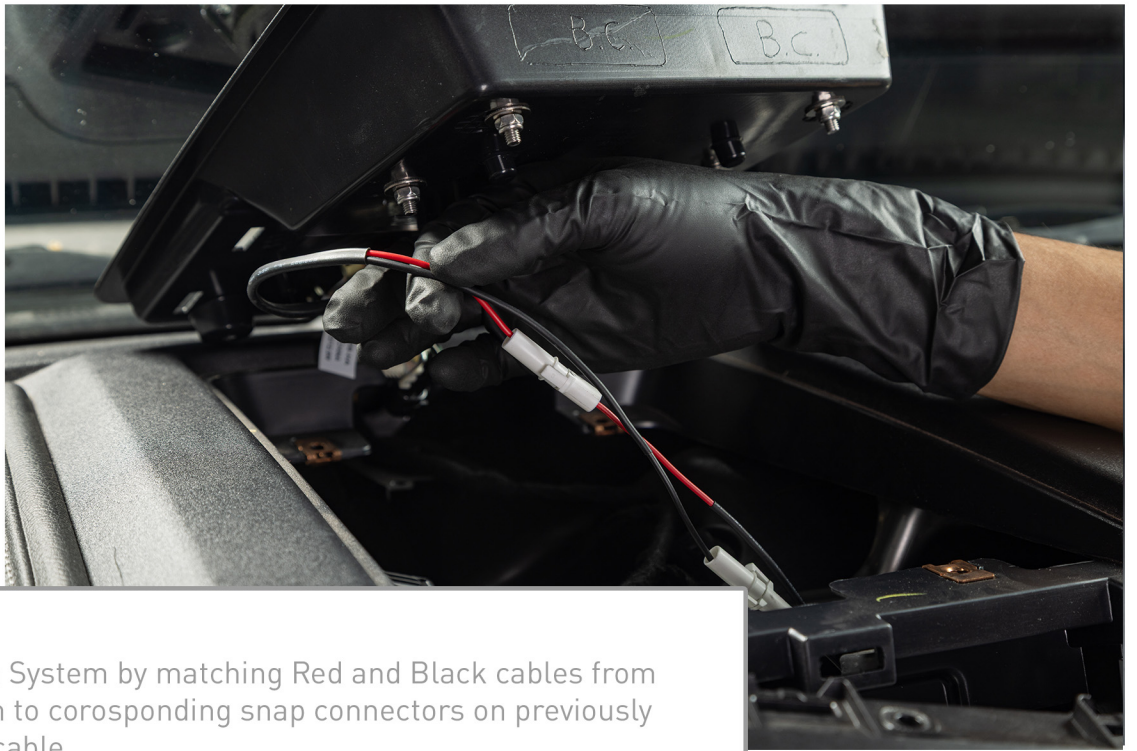

Plug in Charging System by matching Red and Black cables from Charging System to corresponding snap connectors on previously installed power cable.

20



Reinstall factory panels and trim by following disassembly instructions in reverse order. Mount your favorite accesories to your newly installed Dash Mount and enjoy.



ENJOY!

Thank you for purchasing an Integrated Engineering product. We are dedicated to serving your performance needs. Please check our website frequently for new product releases. If you have any questions or concerns about this product please do not hesitate to contact us.

Xodus

+1 (833) 985 7050

WWW.DRIVEXODUS.COM

Help@DriveXodus.com

